



# Installation Instruction

## RP-USB-HAPPY USB Floppy Drive Simulator

When installing the USB Simulator make sure to align the notch on the ribbon cable with the bottom of the unit as shown below.

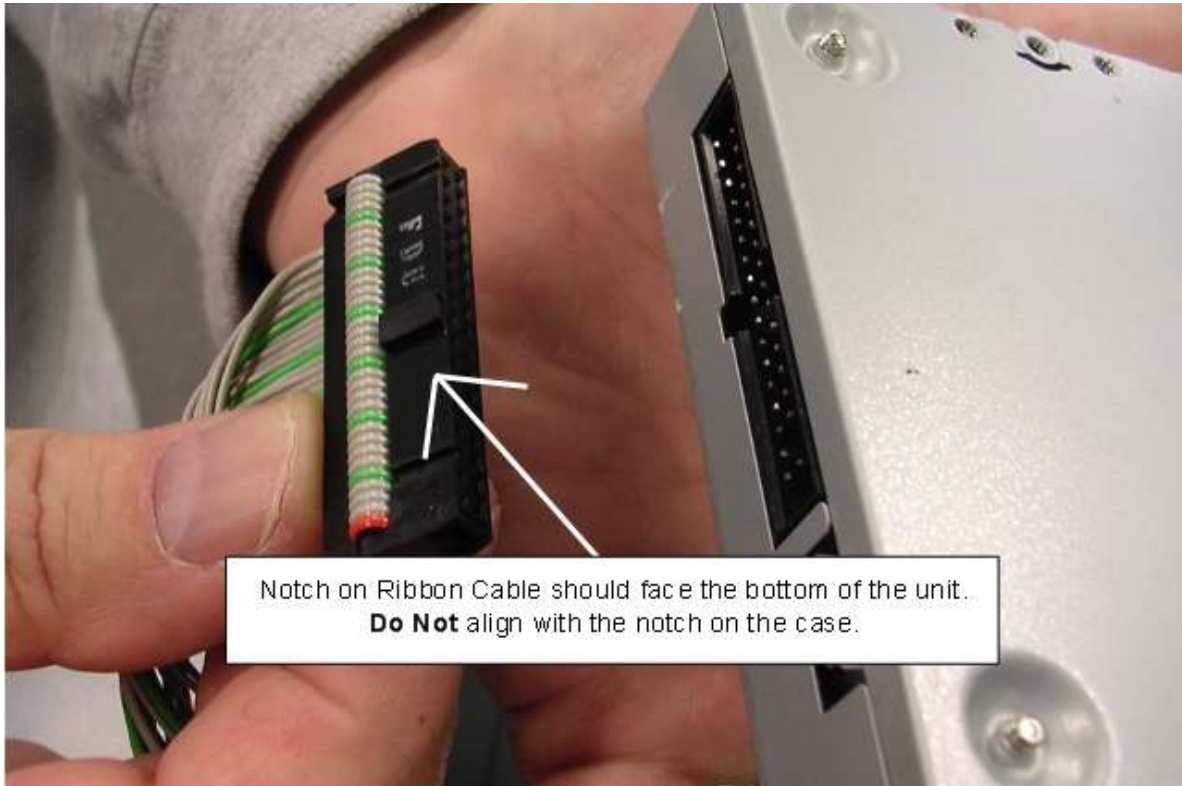

There is a notch on the case but do not align the notch on the ribbon cable with the notch on the case, the unit will not work.

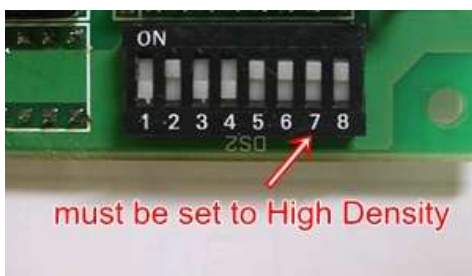

Note - on **HCG1002** or **HCG1004** machines the dip switch setting must be set to HD (High Density). This is usually done by setting dip switch #7 to **ON**.